



Feedo

Forage box feeders

Amigo Silage bale/block distributors



FEEDING



Schuitemaker

We make it work.



Schuitemaker Machines BV was established in 1919 as a manufacturer of machines for the agricultural and industrial sectors. Thanks to many years of experience, Schuitemaker has obtained a prominent position in both sectors. Over the years Schuitemaker has managed to maintain its position by listening to the needs of its customers and by carefully following the latest technological developments. The strength of the machines and other products is their simplicity in particular. Comfort, service, safety and durability for the user are the main pillars of the Company's success.

For the agricultural sector, Schuitemaker specialised in the following market segments:

- Fodder production
- Feeding
- Manure (solid and liquid manure processing)

For the industrial sector Schuitemaker is specialised, among other things, in cold-rolled sections, transport and tipping trailers, sand dumpers, volume dumpers and compost wagons. In addition, Schuitemaker is the importer and distributor of Epoke winter machines for the Netherlands.



Schuitemaker

We make it work.



Feeding with pleasure

Schuitemaker's trailed forage feeders marketed under the brand names of Feedo and Amigo, have been household words for over 35 years. The machines stand out because of their simplicity and durability. The quality and finishing of these machines are second to none. Made to suit the modern dairy farmer who wants to feed his herd in a sensible and easy way. In this brochure you will read about the essential information on the:

Feedo

Forage box feeders

Amigo

Silage bale/block distributors



The most economical alternative for diet feeders.

FEEDO FORAGE BOX FEEDERS

50 till 80

Compact and flexible

The Feedo models 50 till 80 come standard with two beaters and the capacity varies from 8 m³ (DIN) to 18 m³ (DIN). As an optional extra, these Feedo models can also be fitted with three distribution beaters and a 50 cm higher body. This will substantially increase the capacity of the standard Feedo. If the height or the passage of the barn is a problem, the height or width of some models can be reduced to different sizes.



Proven technology for all silage feeders

For many years the Feedo has been the leading trailed forage feeder used to mix and dispense many types of feed. The special Feedo feed distribution beaters ensure that the feed is dispensed evenly and without loss of structure. The side discharge conveyor is used to discharge the machine either to the left or to the right. The machine may also discharge at the front or at the rear, if so required. An optional weighing unit is available to create a clever ration.

The right solution for every farmer

The Feedo Forage box feeders come in various types and models. From the smallest feeding places to the largest barns, Schuitemaker's Feedo line can offer the right solution to every dairy farmer.



Simplicity is power.

FEEDO FORAGE BOX FEEDERS

100 till 170

Simplicity and capacity

The Feedo 100 till 170 is a forage box feeder that stands out for its simplicity and high capacity. The wagons come standard with side panel cage construction and have a heavy-duty dual deck chain consisting of four chains. This allows large amounts of fodder to be processed daily. Depending on the model, the series has either 3 or 4 distribution beaters. These Feedos are also fitted with a braked axle. The Feedo 140 till 170 comes standard with a heavy wheel shaft and is available with a braked tandem. That makes the Feedos also suitable for road transport from the silage to the cow.



The economical alternative

Reliable and indestructible

The modern dairy farmer goes for high-quality products and good returns. The current range of Schuitemaker feeders fits in the trend of the highest productivity for every worker. These feeders not only stand out for their long life and low maintenance, they are also very economical in fuel consumption because of their low power requirement and short feeding times. Apart from that, Schuitemaker has been applying the cage construction, the powder-coated paint on the side panels and the indestructible UNP - chassis for many years. When the machine is filled in layers the product will be mixed threw the beaters while bringing it out onto the cross-conveyor. So in a short time you can feed your cows with a airy and well balanced quantity.



Solid steel superstructure with a hard coat of paint.

FEEDO FORAGE BOX FEEDERS

Optional extras for optimal results

The Feedo is available with many optional extras and possibilities. A closed aggressive distribution beater with knives is recommended for processing long materials. In extreme cases, an extra mixing beater can also be put above the cross conveyor to provide a homogeneous product. Schuitemaker provides a concentrate dispensing container to dispense additional feed components. The Feedo can be electric-hydraulically operated from the tractor cabin using a very clear control box.



The ultimate all-rounder

Schuitemaker considers quality and durability to be very important. In the design stage, simplicity is one of the key elements and becomes one of the strong features of the machines. Schuitemaker machines guarantee the optimal price, quality and performance ratio, and that is the reason why their feeding machines rank among the very best on the market.



Optimal quality of the feed for a healthy cow.

FEEDING WITH **SCHUITEMAKER**






A machine built for the future

De Feedo stands out because of its simplicity and also contributes to keeping the costs of feeding down. In addition, the machine dispenses a product that is thoroughly mixed and airy when dispensed to the herd. All these features contribute to a healthy herd and optimal milk production. The Feedo forage box feeder is the appropriate choice for the modern dairy farmer who goes for good returns and sustainability, immediately as well as for the longer term.



The Schuitemaker Amigo: a real winner.

AMIGO SILAGE BALE AND BLOCK DISTRIBUTOR 20(S), 30 S

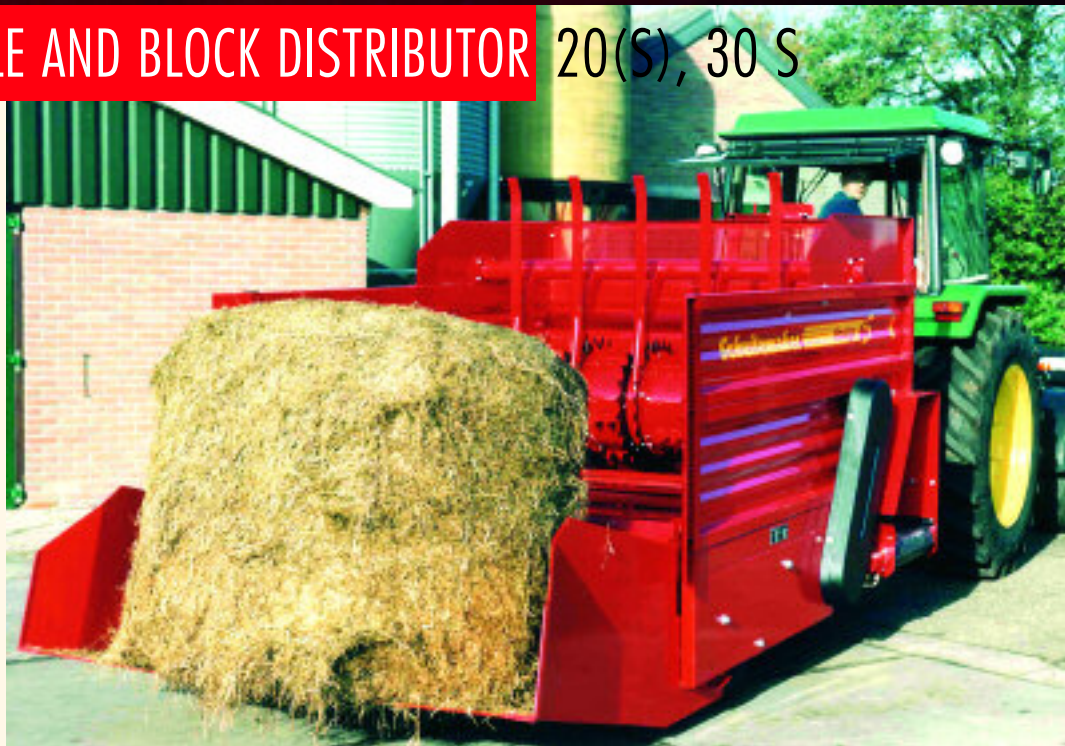



Open your home to a friend

The Amigo silage bale and block distributor series consists of the models 20, 20 S, 30 S and the very latest Amigo 40. The Amigo 20 is absolutely great for silage and maize blocks, as well as for bulk products. The S models have been developed for processing round and square bales in particular. These models can be extended with knives on the beaters for processing any uncut materials. The many applications and the complete models make light work and make the Amigo to become a real friend as the name suggests.



The ideal mix.

AMIGO SILAGE BALE AND BLOCK DISTRIBUTOR 40 S





Innovation in feeding

The silage bale and block distributor Amigo 40 comes with a hydraulically driven deck chain that takes the feed to the distribution beaters. The Amigo 40 S has one closed beater down and an open beater up. Knives can be attached to the lower beater in order to process long materials.

The side discharge conveyor is used to properly and lightly take the feed in front of the animals. As an option, the Amigos can be fitted with an electric/hydraulic remote control. The 30 and 40 models from the series can also be fitted with a 3-point weighing unit.



TECHNOLOGY

The Feedo comes standard with:

- Panels with a rock-hard powder-coated layer of paint
- Cage construction (Feedo 70 till 170)
- Lowered underframe (Feedo 70 till 170)
- All-steel body
- Deck chain hydraulically driven with 2 chains (Feedo 50 till Feedo 80)
- Deck chain hydraulically driven with 4 chains (Feedo 100 till Feedo 170)
- Variable speed control of the deck chain by regulation valve
- Hydraulically driven cross-conveyor, unloading from the left and from the right
- Cross-conveyor 80cm wide
- Operation from tractor cabin
- Cover above the beaters
- PTO with slipclutch for driving the beaters
- Side guard of the cross-conveyor using rubber flaps
- Upper hinging tailboard (for wagons unloading at the front)
- Hydraulic jack by tractor hydraulics**

Optional equipment Feedo :

- Variable speed for cross-conveyor
- Elevator extension for cross-conveyor (+52cm)
- Parted Cross-conveyor
- Wood protection on top of sidepanels
- Extra mixbeater above the cross-conveyor
- Operation by bowdencables
- Electric-hydraulic controls
- Concentrate hopper
- Closed bottom beater with knives
- Weighing unit
- Lights

** Feedo's for the UK are coming standard with skid and with hydraulic brakes



Feedo model	Body volume m ³	Beaters	Body dimensions (cm)			Total dimensions (cm)			Tyres	Discharge height cm	With conveyor belt cm(max)
			l	w	h	l	w	h			
50-8	8	2	400	160	120	614	190	236	13x16-10pr	94	146
50-11	11	3	400	160	170	614	190	286	13x16-10pr	94	146
60-10	10	2	400	190	120	614	220	239	12,5x18-12pr	97	149
60-13	13	3	400	190	170	614	220	289	12,5x18-12pr	97	149
60L-9	9	2	440	160	120	654	190	239	12,5x18-12pr	97	149
60L-13	13	3	440	160	170	654	190	289	12,5x18-12pr	97	149
70-11	11	2	440	190	125	654	220	240 ²	15x18-16pr	94 ²	146
70-15	15	3	440	190	175	654	220	290 ²	15x18-16pr	94 ²	146
80-13	13	2	520	190	125	734	220	240 ²	15x18-16pr	94 ²	146
80-18	18	3	520	190	175	734	220	290 ²	15x18-16pr	94 ²	146

Standard Specifications Feedo:

16 | 17

Feedo model	m ³		l	w	h	l	w	h	Tyres	cm	cm(max)
100-15	15	2	520	220	125	734	250	238	500/50x17-14pr	91	143
100-20	20	3	520	220	175	734	250	288	500/50x17-14pr	91	143
140-21E	21	3	560	220	165	764	250	282	315/70R22,5	93	145
140-21T	21	3	560	220	165	764	250	282	500/50x17-14pr	93	145
150-25E	25	4	560	220	205	764	250	322	315/70R22,5	93	145
150-25T	25	4	560	220	205	764	250	322	500/50x17-14pr	93	145
160-23E	23	3	640	220	165	764	250	282	315/70R22,5	93	145
160-23T	23	3	640	220	165	764	250	282	500/50x17-14pr	93	145
170-30T	30	4	640	220	205	764	250	322	500/50x17-14pr	93	145

* Overall length of rear-discharging wagon is 5cm longer

² Feedo 70-80 UK has tyre 16x20-12pr instead of 15x18-16pr Total height and discharge height is then 9cm higher



Standard Specifications Amigo:

Amigo Model		20	20 S	30 S	40 S
Capacity	m3	3,5	3,5	5,0	7,0
Max. usable load	kg	2.000	2.000	3.000	4.000
Box dimensions (lxbxh)	cm	194x190x80	194x190x90	274x200x90	354x200x120
Overall dimensions (lxbxh)	cm	377x230x178	377x230x178	457x240x213	537x240x217
Tyre-size		6x9-10pr(4x)	6x9-10pr(4x)	10x15-12pr(2x)	10x15-12pr(2x)
Discharge height	cm	47	47	70	70
Power requirement	kW	30	35	40	45
Oil-flow requirement	L/min	25	25	25	25
Oil-pressure requirement	bar	150	150	150	150
Unladen weight	kg	1.350	1.460	1.750	2.000

TECHNOLOGY

Amigo

The Amigo comes standard with:

- All-steel body
- Hydraulically controlled loading board
- Extra heavy-duty, hydraulically driven deck chain
- Variable speed control of the deck chain by regulation valve
- Hydraulically driven cross-conveyor, unloading from the left and from the right
- Operation from tractor cabin
- Very aggressive, mechanically driven beater with slip-clutch
- Especially patented rack (Amigo 20, 20 S and 30 S)
- Panels with a rock-hard powder-coated layer of paint
- Cover above the beaters (Amigo 40 S)

Optional equipment Amigo

- Variable speed for cross-conveyor
- Set cutting-knives for aggressive beater (Only S-models)
- Operation by bowdencables
- Electric-hydraulic controls
- Weighing unit (Amigo 30 S and 40 S)



Simplicity
Universal
Durable
Efficient

Amigo

WWW.SR-SCHUITEMAKER.NL



Partners for life.



Schuitemaker

We make it work.